


Haitai **TaiHe2.0** 0BB

HTM620~640DMH5-78NT

TOPCon Bifacial high efficiency PV module

22.90%

Module Efficiency

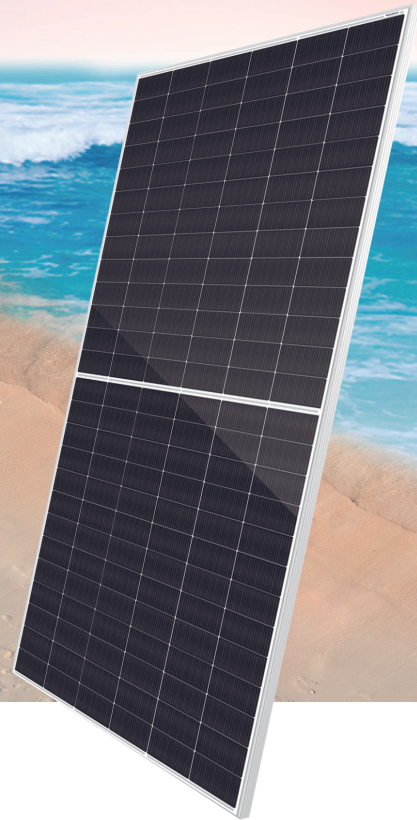

PRODUCT FEATURES



High Power Output

N-type 0BB half cut technology, improve energy density, bring higher power output.
High Bifacial Factor, up to 25% extra power generation



High Durability

Passed TUV Salt & Ammonia corrosion test, and 2400Pa wind load, 5400Pa snow load test, higher reliability



exquisite appearance

The battery has no main grid design, and the overall color of the product tends to be consistent



Low Power Degradation

First year power degradation <1.0%, year 2-30 power degradation <0.40% each year



Low Temperature coefficient


Passivated contact cell technology for higher power generation in operating



Better Anti-LID

N-type cells with boron-oxide-free composite LID to increase module power generation

LINEAR PERFORMANCE WARRANTY

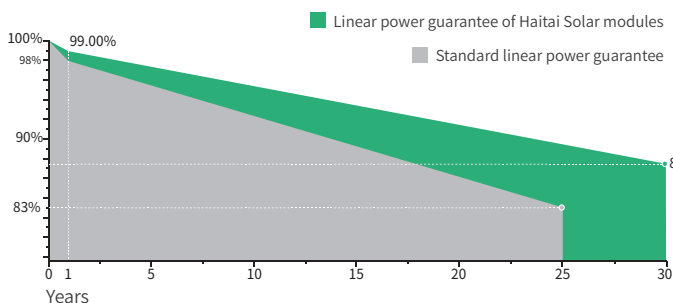

product warranty



linear power warranty



Linear attenuation of 0.40% per year within 30 years

CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems
- IEC62941:2019 Photovoltaic Module Manufacturer Quality Management System



Linkedin/Facebook
Haitai Solar



Tel
400 0835 985



Website
www.haitai-solar.com



E-mail
ht@htsolargroup.com

Electrical Data (STC)

Maximum Power (Pmax/W)	620	625	630	635	640
Open Circuit Voltage (Voc/V)	56.28	56.43	56.58	56.73	56.88
Short Circuit Current (Isc/A)	13.77	13.84	13.92	13.99	14.06
Voltage at Maximum Power (Vmp/V)	47.32	47.47	47.62	47.77	47.92
Current at Maximum Power (Imp/A)	13.11	13.17	13.23	13.3	13.36
Module Efficiency (%)	22.18	22.36	22.54	22.72	22.90
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C , AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	466	470	474	478	482
Open Circuit Voltage (Voc/V)	53.51	53.66	53.81	53.96	54.11
Short Circuit Current (Isc/A)	11.24	11.3	11.37	11.43	11.49
Voltage at Maximum Power (Vmp/V)	43.82	43.97	44.12	44.27	44.42
Current at Maximum Power (Imp/A)	10.64	10.69	10.75	10.8	10.86

NMOT (Nominal Moudule Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C , AM1.5, Wind Speed 1m/s.

Bifacial Power Generation Parameters (Backside Gains)

5%	Maximum Power (Pmax/W)	651	656	662	667	672
	Module Efficiency (%)	23.29	23.48	23.66	23.85	24.04
15%	Maximum Power (Pmax/W)	713	719	725	730	736
	Module Efficiency (%)	25.51	25.71	25.92	26.12	26.33
25%	Maximum Power (Pmax/W)	775	781	788	794	800
	Module Efficiency (%)	27.73	27.95	28.17	28.40	28.62

Mechanical Data

Cell Type	182×91mm
Cell Orientation	156(6×26)
Module Dimensions	2465×1134×30mm
Weight	34.5kg
Front Glass	2.0mm high transmittance, reinforced glass
Rear Glass	2.0mm part of the structure is grid-like white ceramic glass
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized


Temperature Coefficients

Temperature Coefficient (Pm)	-0.290%/°C
Temperature Coefficient (Voc)	-0.250%/°C
Temperature Coefficient (Isc)	0.045%/°C
NMOT (Nominal Moudule Operating Temperature)	41±3°C

Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	576 pcs	36 pcs +36 pcs

Module Dimensions (mm)

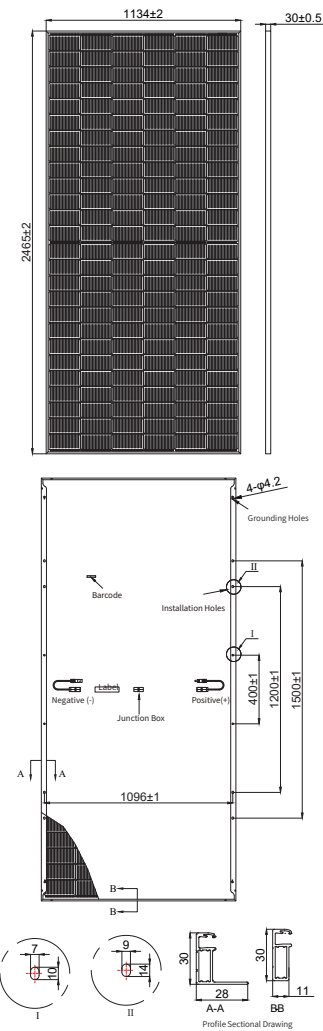

I-V Curve

